


Ausführung: Vollrost (mit gegenseitiger Verrastung / max. 35 mm Stanzung)

Querstabneigung 45°

Material: - Stahl
- Edelstahl
- Aluminium

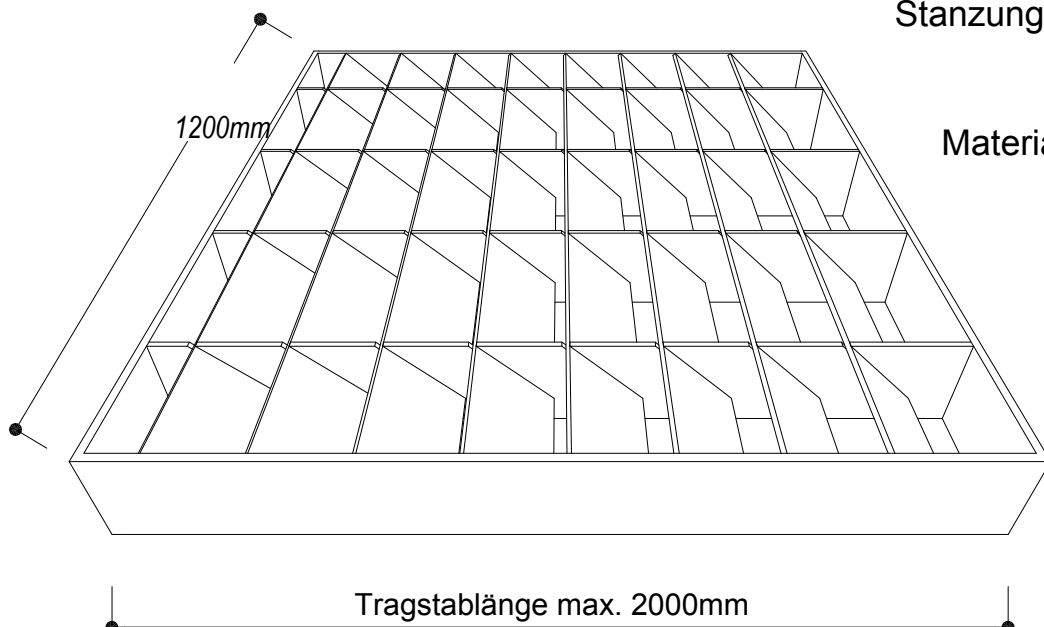





- 16.65
- 33.3
- 66.6
- 99.9

FS-Abstand

Querstab 35-2

Tragstab 40-2
mit Ausklinkung 17.5

RE FI 40-

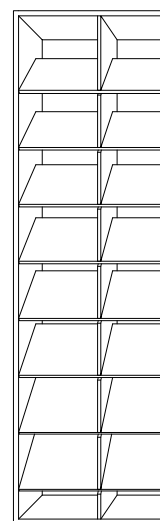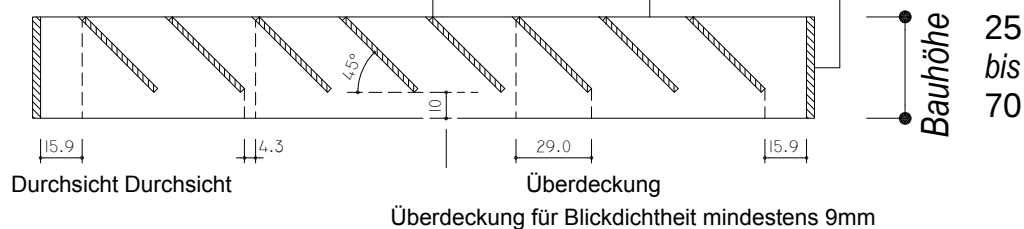

Überstehende
Querstäbe ->
Stanzung wird
tiefer
ausgeführt

Varianten

Abmessungen und
Spezifikationen

TS FS RE

25-2	20-2	25-3
30-2	25-2	30-3
35-2	30-2	35-3
40-2	35-2	40-3
45-2	45-2	45-3
50-2	50-2	50-3
55-2	55-2	55-3
60-2	60-2	60-3
65-2	65-2	65-3
70-2	70-2	70-3

