





Teostus: täisrest (koos vastaslukustusega / max. 35 mm väljalõikega)

Sidevarda nurk 45°

Materjal: - teras  
- roostevaba teras  
- alumiinium

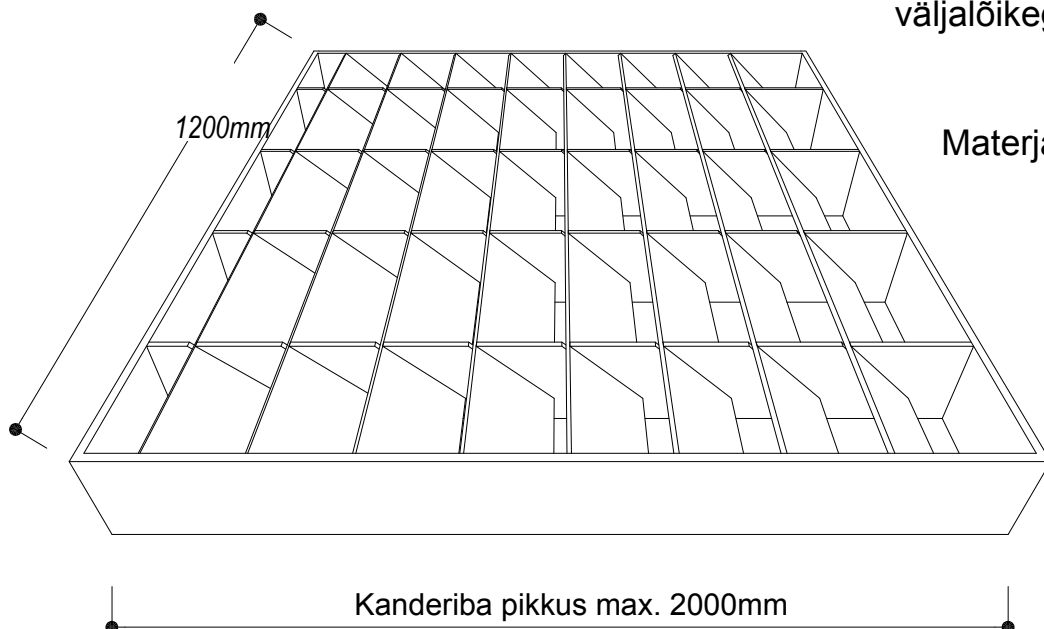

- 16.65
- 33.3
- 66.6
- 99.9

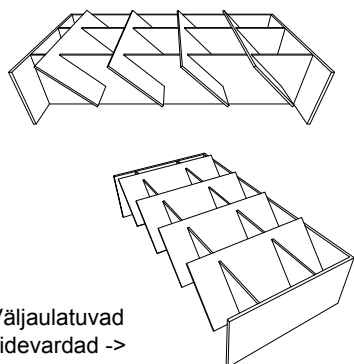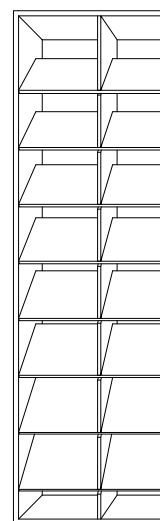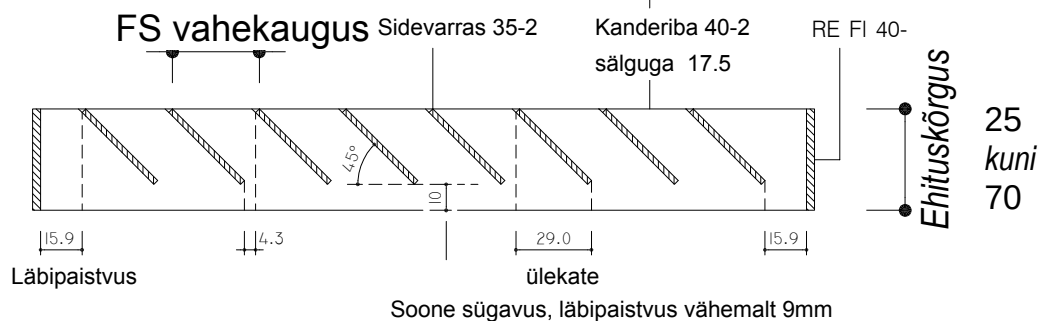

Väljaulatuvad sidevardad -> stantsimine teostatakse allpool

### Variandid

Mõõdud ja spetsifikatsioonid

TS FS RE

|      |      |      |
|------|------|------|
| 25-2 | 20-2 | 25-3 |
| 30-2 | 25-2 | 30-3 |
| 35-2 | 30-2 | 35-3 |
| 40-2 | 35-2 | 40-3 |
| 45-2 | 45-2 | 45-3 |
| 50-2 | 50-2 | 50-3 |
| 55-2 | 55-2 | 55-3 |
| 60-2 | 60-2 | 60-3 |
| 65-2 | 65-2 | 65-3 |
| 70-2 | 70-2 | 70-3 |

