
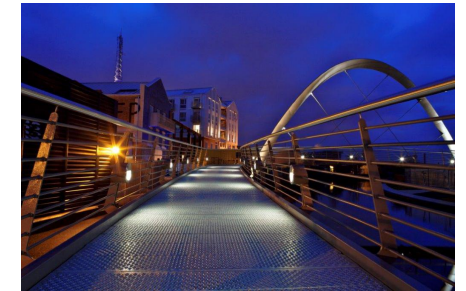


Panel type: AP30 - perforated panel with anti-slip and drainage holes on a 30 mm staggered pitch.

Variants:	AP30 MAW — anti-slip holes Ø 8 mm (punched up 3 mm) + drainage holes Ø 5 mm (punched down 3 mm), 30 mm c.t.c. staggered. AP30 ZAW — anti-slip holes Ø 8 mm only, 30 mm c.t.c. staggered. AP30 VMA — safety variant: anti-slip Ø 5 mm + drainage Ø 5 mm (heel-proof). AP30 VZA — safety variant: anti-slip Ø 5 mm only (heel-proof).
Properties:	- excellent anti-slip performance - effective drainage (MAW / VMA) - heel-proof (VMA / VZA) — suitable for public areas - folded design for a stiff, stable platform - reduced transparency
Material:	Steel S235JR, 2 mm — hot-dip galvanised / coated / duplex Stainless steel AISI 304, 2 mm Stainless steel AISI 316L, 2 mm
Dimensions:	Thickness: 2 mm Maximum span: up to 3 m (longer spans with double / triple settings) Custom widths, cut-outs and free designs available on request.
Applications:	Floors · Staircases · Walkways · Platforms · Facades & cladding · Fences & partitions · Sun screening · Balconies & balustrades.
Industries:	Residential · Utility · Public areas · Civil · Vehicles & heavy duty · Industrial · Chemical · Food & pharmaceutical · Automotive · Offshore.

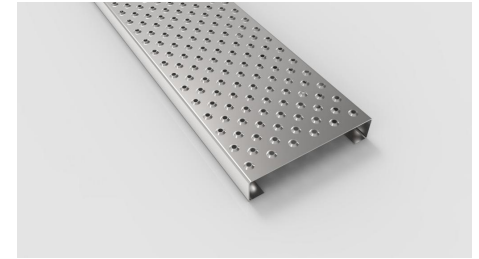

NB! The data provided is informative. Specify the exact specification with the supplier.