
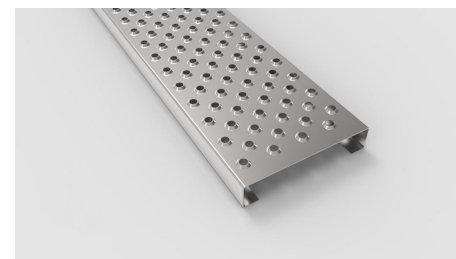


Panel type: AP40 - perforated plank with anti-slip and drainage holes on a 40 mm staggered pitch.

Variants:	AP40 MAW — anti-slip Ø 14 mm (punched up 4 mm) + drainage Ø 8 mm (punched down 2 mm), 40 mm c.t.c. staggered. AP40 ZAW — anti-slip Ø 14 mm only, 40 mm c.t.c. staggered (no drainage). AP40 NOP — closed/embossed dome Ø 14 mm, 4 mm high, 40 mm staggered.
Properties:	- excellent anti-slip performance - effective drainage (MAW) - closed surface available (NOP) — no see-through - folded design for a stiff, stable platform - reduced transparency
Material:	Steel S235JR, 2 / 3 mm — hot-dip galvanised / coated / duplex / pickled Stainless steel AISI 304 & 316L, 2 / 3 mm Aluminium AlMg3-G22, 3 mm — anodised
Dimensions:	Thickness: 2 mm or 3 mm Maximum span: up to 3 m Custom widths and cut-outs available; solid plank variants on request.
Applications:	Floors · Facades & cladding · Fences & partitions · Sun screening · Balconies & balustrades.
Industries:	Residential · Utility · Public areas · Civil · Vehicles & heavy duty · Industrial · Chemical · Food & pharmaceutical · Automotive · Offshore.

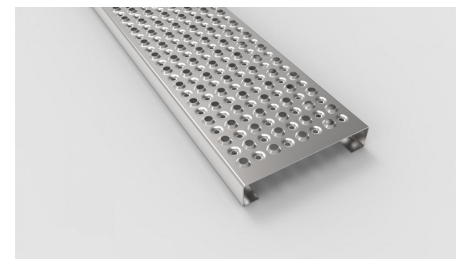

NB! The data provided is informative. Specify the exact specification with the supplier.