


Panel type: AP50 - perforated plank with anti-slip and drainage holes on a 50 mm staggered pitch.

Variants:	AP50 MAW — anti-slip Ø 14 mm punched up 4 mm + drainage Ø 8 mm, 50 mm c.t.c. staggered. AP50 ZAW — anti-slip Ø 14 mm only. AP50 MAA — embossed dome Ø 8 mm, 3 mm high + drainage. AP50 ZAA — embossed dome Ø 8 mm, 4 mm high (basis for JettyDeck). AP50 NOP — closed embossed dome Ø 14 mm, 4 mm high. AP50 DOP — Ø 14 mm punched down 4 mm (square pitch, rubber-cap compatible).
Properties:	- excellent anti-slip performance - effective drainage (MAW / MAA) - closed and rubber-cap variants available - folded design for a stiff, stable platform - reduced transparency
Material:	Steel S235JR, 2 / 3 mm — hot-dip galvanised / coated / duplex / pickled Stainless steel AISI 304 & 316L, 2 / 3 mm Aluminium, 3 mm — anodised
Dimensions:	Thickness: 2 mm or 3 mm Maximum span: up to 3 m (longer with double / triple settings) Custom widths, cut-outs and free designs on request.
Applications:	Floors · Staircases · Access platforms · Walkways · Facades & cladding · Fences & partitions · Sun screening · Balconies & balustrades · HVAC enclosures · Bike storage.
Industries:	Residential · Utility · Public areas · Civil · Vehicles & heavy duty · Industrial · Chemical · Food & pharmaceutical · Automotive · Offshore.

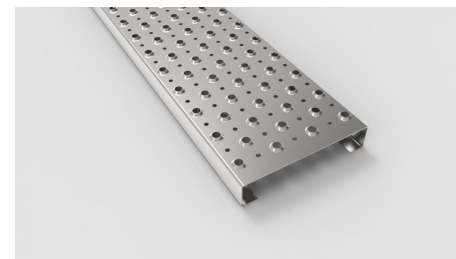

NB! The data provided is informative. Specify the exact specification with the supplier.