
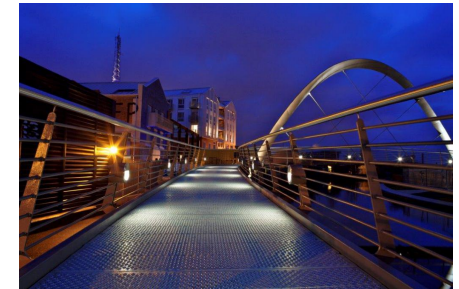


Panel type: AP GES - fully closed perforated panel with convex anti-slip points, no see-through.

Hole pattern:	Anti-slip convex perforation Ø 11 mm (not fully punched out), c.t.c. 20 / 25 mm, 3 mm high. Two equal rows followed by one row, staggered.
Properties:	- closed surface — no see-through, eliminates fear of heights - excellent anti-slip from convex points - wide variety of widths, heights and settings - ideal for indoor use
Material:	Steel — 1.5 / 2 / 2.5 mm — hot-dip galvanised / coated / duplex / pickled Aluminium — 3 mm — anodised
Dimensions:	Steel: width 150–400 mm (2.0 mm) or 150–300 mm (2.5 mm); max. length 6 m Aluminium: width 150–400 mm; max. length 4 m Height: 40 / 50 / 75 mm
Applications:	Indoor floors · Stairs · Landings · Steps.
Industries:	Utility · Public areas · Civil · Industrial · Chemical · Automotive.

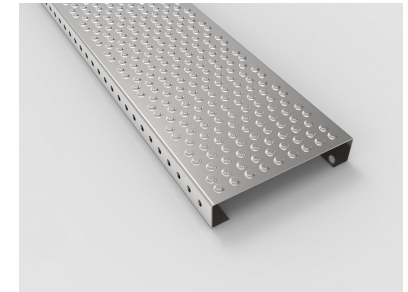

NB! The data provided is informative. Specify the exact specification with the supplier.