


Panel type: AP OFF - offshore perforated panel for extreme weather, maximum drainage and grip.

Hole pattern:	Anti-slip perforation Ø 11 mm, c.t.c. 30 / 50 mm, 3 mm high. Drainage perforation 2× Ø 6 mm, c.t.c. 30 / 18 mm, 3 mm deep.
Properties:	- engineered for extreme weather and offshore environments - optimised drainage capacity - maximum anti-slip protection - reduces fall and tripping hazards
Material:	Steel — 1.5 / 2 / 2.5 mm — hot-dip galvanised / coated / duplex / pickled Aluminium — 2.5 mm — anodised
Dimensions:	Width: 150–300 mm (steel and aluminium) Height: 40 / 50 / 75 mm Maximum length: 6 m Custom cut-outs available.
Applications:	Walkways · Platforms · Landings · Steps · Floors · Stairs.
Industries:	Industrial · Chemical · Automotive · Offshore.

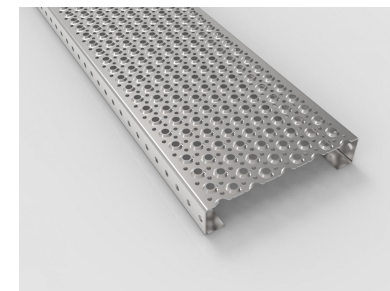

NB! The data provided is informative. Specify the exact specification with the supplier.