
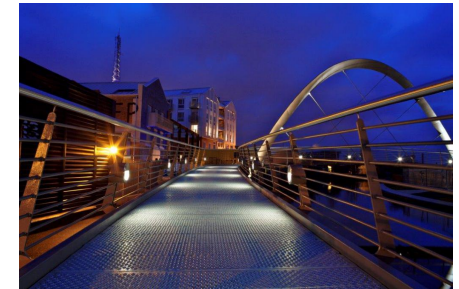


Panel type: AP STE - slotted perforated panel with oval drainage slots and anti-slip punching.

Hole pattern:	Anti-slip perforation Ø 8 mm, c.t.c. 62.5 mm, 3 mm high — combined with long oval drainage slots.
Properties:	- excellent water drainage through slotted perforations - enhanced coefficient of friction from punched holes - reduced transparency — minimises fear of heights - many customisation options
Material:	Steel — 1.5 / 2 / 2.5 mm — hot-dip galvanised / coated / duplex / pickled Stainless steel — 1.5 / 2 / 2.5 mm Aluminium — 2.5 mm — anodised
Dimensions:	Width: 150 / 200 / 250 / 300 mm Height: 40 / 50 / 75 mm Length: up to 6 m (steel / aluminium); up to 3 m (stainless steel)
Applications:	Floors · Stairs · Drainage gutters.
Industries:	Utility · Public areas · Civil · Industrial · Chemical · Automotive.

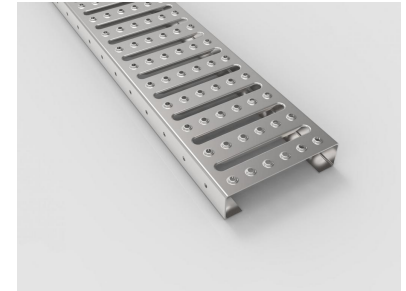

NB! The data provided is informative. Specify the exact specification with the supplier.