
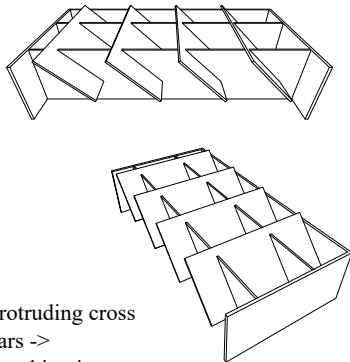
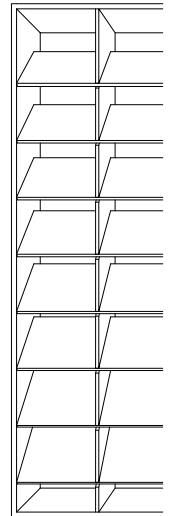
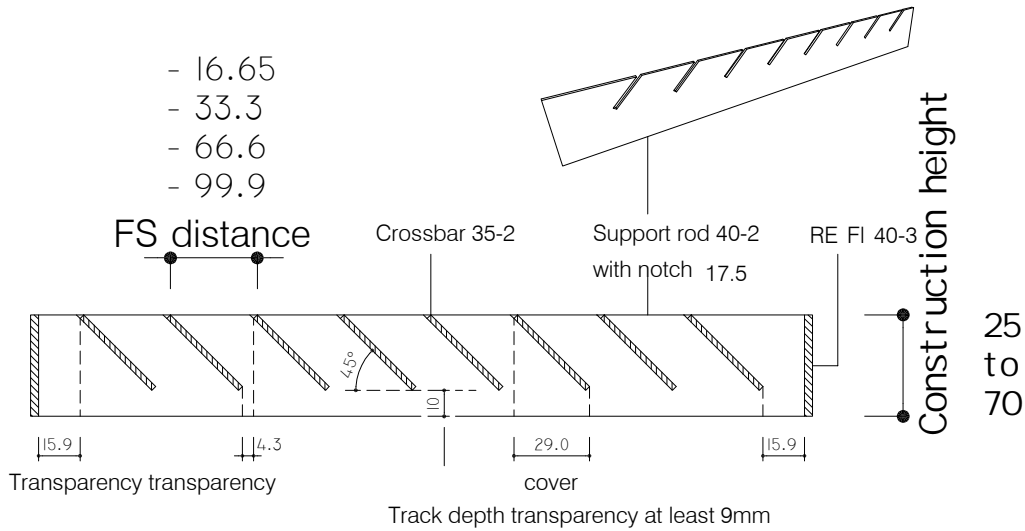


Design: full grate (with counter-latching / max. 35 mm punching)

Cross bar angle 45°

Material: - steel
- stainless steel
- aluminum

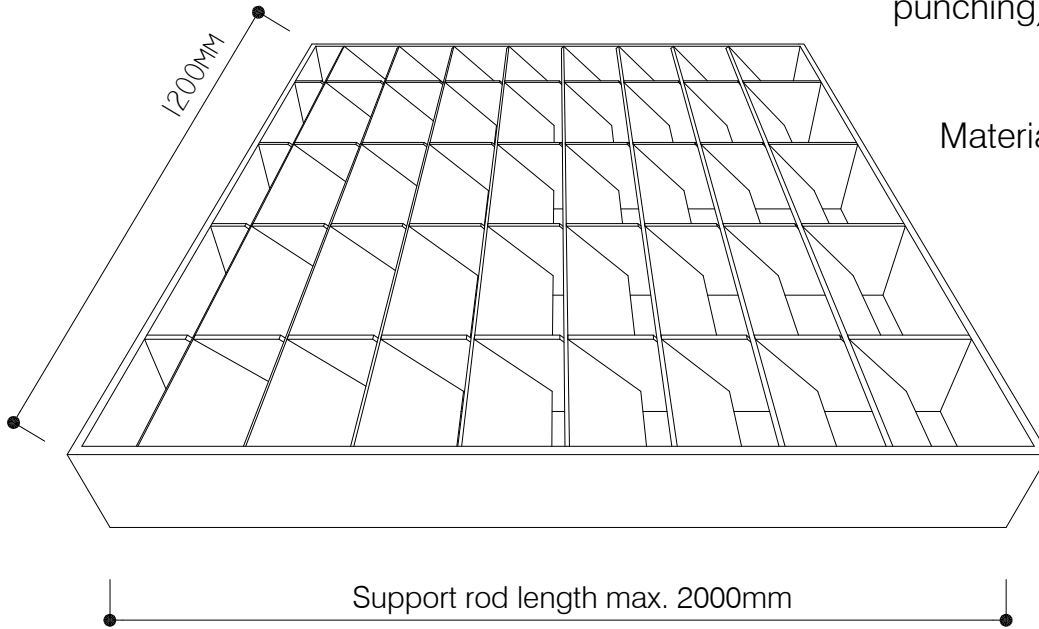

Protruding cross bars -> punching is carried out lower

Variants

Dimensions and specifications

| TS | FS | RE |
|------|------|------|
| 25-2 | 20-2 | 25-3 |
| 30-2 | 25-2 | 30-3 |
| 35-2 | 30-2 | 35-3 |
| 40-2 | 35-2 | 40-3 |
| 45-2 | 45-2 | 45-3 |
| 50-2 | 50-2 | 50-3 |
| 55-2 | 55-2 | 55-3 |
| 60-2 | 60-2 | 60-3 |
| 65-2 | 65-2 | 65-3 |
| 70-2 | 70-2 | 70-3 |

